

The background of the cover features a detailed technical drawing of a spiral bevel gear assembly. Overlaid on this are several 3D rendered gears. In the upper half, there are blue gears of various sizes. In the lower half, there are larger orange and yellow gears. A technical pen and a pair of calipers are also visible, resting on the technical drawing.

SPIRAL BEVEL GEAR CATALOG



**ARROW
GEAR
COMPANY**

SPECIALISTS IN HIGH PRECISION GEARS

Since its inception in 1947, Arrow Gear Company has continued to build a solid reputation for quality, service and reliability. From the very beginning, Arrow has provided high precision spur, helical and bevel gears that meet the rapidly changing and demanding requirements of the gear industry.

Arrow's primary goal is to insure customer satisfaction by improving the manufacturing process, eliminating waste, and delivering a quality product on time at a competitive price.

To achieve these objectives, Arrow has embraced the continuous improvement philosophy while implementing the most advanced technology available for the machining, heat treatment and inspection of our products. We are an approved supplier to major companies throughout the world and have consistently received vendor awards for both quality and on-time delivery. Arrow Gear takes great pride in its history of steady growth and its record for maintaining long-lasting customer relations.



**ARROW
GEAR
COMPANY**

**2301 Curtiss Street
Downers Grove, Illinois 60515, USA
(630) 969-7640
FAX: (630) 969-0253
www.ArrowGear.com**

STOCK SPIRAL BEVEL GEARS


We stock 51 different sets of lapped spiral bevel gears in ratios of 1 to 1, 2 to 1, 3 to 1, 3 to 2 and 4 to 3 and 8 different sets of ground tooth spiral bevel gears in ratios of 1 to 1 and 2 to 1. Should you be unable to satisfy your gear requirements from the selection of stock gears listed in our catalog, please contact us for assistance. We can modify most of our stock gears to your specifications.

Custom Gears


In addition to the stock gears listed in this catalog we manufacture spiral bevel, hypoid, Zerol® bevel, Coniflex® bevel, helical and spur gears, as well as Curvic® couplings to customers' prints and specifications. Please refer to the following chart for the complete range of sizes and capabilities.

TABLE OF CONTENTS


| | |
|---|-----|
| TYPES OF GEARS AND SIZES | 3 |
| RATING DATA AND SPECIFICATIONS | 4 |
| STANDARD STOCK GEAR SPECIFICATIONS | 5-9 |
| ARROW-STAN® NON-STOCK GEARS | 10 |
| STOCK GROUND TOOTH GEARS | 12 |
| DESIGN CONSIDERATIONS | |
| Bearing Loads | 14 |
| Installation | 15 |
| Mountings | 16 |
| Bearing Pattern | 18 |
| Application | 19 |



Spiral Bevel



Zerol® Bevel



Coniflex® Bevel




Spur

| RANGE SIZE AND CAPABILITIES | | | | | |
|-----------------------------|------------------------|--------------------------------|------------|----------------|--------------|
| Type of Gear | Maximum Pitch Diameter | Diametral Pitch | Face Width | Unground Tooth | Ground Tooth |
| Spiral Bevel | 30" | 1.5 - 48 | 5.0 | AGMA 9* | AGMA 13 |
| Zerol® Bevel | 22" | 1.5 - 48 | 4.0 | AGMA 9* | AGMA 13 |
| Coniflex® Bevel | 28" | 2.5 - 48 | 6.0 | AGMA 9* | -- |
| Helical | 36" | 3.0 - 48 | 13.0 | AGMA 9 | AGMA 13 |
| Internal Spur | 32" | 3.6 - 48 | 8.0 | AGMA 9 | AGMA 13 |
| Internal Spline | 32" | 3.6 - 48 | 8.0 | AGMA 9 | AGMA 13 |
| Spur | 36" | 3.0 - 48 | 13.0 | AGMA 9 | AGMA 13 |
| Spline | 36" | $\frac{4}{8} - \frac{80}{160}$ | 13.0 | AGMA 9 | AGMA 13 |

*Some Configurations to AGMA Quality Number 10 (lapped).



Helical



Curvic® Coupling

Standard and ground tooth
stock spiral bevel gears ...

RATING DATA AND SPECIFICATIONS

Arrow stock gears are lapped to AGMA Quality Number 9 or ground to AGMA Quality Number 11. Each pair of gears is made of alloy steel with carburized and hardened teeth. 20° pressure angle and 35° spiral angle are standard. All pinions are left hand spiral. Mounting distance, backlash, mating teeth and set number are etched on each pair. See page 16.

Hub type gears can be rebored to the maximum diameter specified in the tables. It is preferred that all remachining of bores be performed by Arrow Gear Company.

Calculations

$$T_w = \frac{HP \times 63025}{RPM}$$

HP = Horsepower
 T_w = Working torque (in. lb.)
 RPM = Revolutions/minute

$$T_r = T_w \frac{SF}{K_v}$$

T_a = Allowable torque (in. lb.)
 T_r = Catalog torque (in. lb.) (SF = 1)
 K_v = Velocity Factor

$$= \sqrt{\frac{78}{78 + \sqrt{PLV}}} \quad \left(\begin{array}{l} \text{Lapped} \\ \text{AGMA Q9} \end{array} \right)$$

$$= 1 \quad \text{(Ground AGMA Q11)}$$
 PLV = Pitch line velocity

$$= 0.262 \times RPM \times \text{Pitch Diameter}$$
 SF = Service Factor

Service factors have been determined by many industries for specific applications from field data and should be used when available. In the absence of a service factor, select an appropriate overload factor.

OVERLOAD FACTORS

| POWER SOURCE | CHARACTER OF LOAD ON DRIVEN MACHINE | | |
|--------------|-------------------------------------|--------------|-------------|
| | Uniform | Medium Shock | Heavy Shock |
| Uniform | 1.00 | 1.25 | 1.75 |
| Light Shock | 1.25 | 1.50 | 2.00 |
| Medium Shock | 1.50 | 1.75 | 2.25 |

Arrow Stock Gear Selection

- 1) Calculate the pinion working torque (T_{wp}).

$$T_{wp} = \frac{63025 \times HP}{RPM_p}$$
- 2) Estimate the rated pinion torque (T_{rp}).

$$T_{rp} = 2 \times T_{wp}$$
- 3) Find the rated pinion torque in the catalog that is approximately equal to the estimated torque.
- 4) Calculate the pitch line velocity (PLV).

$$PLV = 0.262 \times \text{pinion pitch diameter} \times RPM_p$$
- 5) Calculate the dynamic factor K_v .

$$K_v = \sqrt{\frac{78}{78 + \sqrt{PLV}}}$$

- 6) Calculate the allowable pinion torque (T_{ap}).

$$T_{ap} = T_{rp} \times K_v$$
- 7) Calculate the service factor.

$$SF = \frac{T_{ap}}{T_{wp}}$$

Example

Customer requires a bevel 3:1 reduction

Pinion speed = 1800

HP = 38

Then:
$$T_{wp} = \frac{63025 \times 38}{1800} = 1330 \text{ in. lb.}$$

First estimate

$$T_{rp} = 2 \times 1330 \text{ in. lb.} = 2660 \text{ in. lb.}$$

From the 3:1 ratios on page 7

(6P45L15/6P15R45):

$$T_{rp} = 2381 \text{ in. lb. (catalog value)}$$

$$PLV = 0.262 \times 2.5 \times 1800 = 1179$$





$$K_v = \sqrt{\frac{78}{78 + \sqrt{1179}}} = 0.833$$

$$T_{ap} = 2381 \text{ in. lb.} \times 0.833 = 1983 \text{ in. lb.}$$

$$SF = \frac{1983}{1330} = 1.49$$

A 1.49 SF indicates that the stock gear set has a capacity of 1.49 times that required.

Gear sizes in this manual must be selected from the calculated allowable torque. For applications involving unusual conditions, our Engineering Service is available.

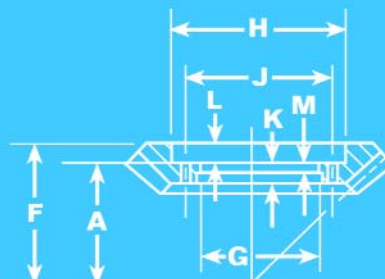
Figure 1

Figure 2

Figure 3

Figure 4





| Part No. | 18P18L18 | 18P18R18 | 12P18L18 | 12P18R18 | 10P20L20 | 10P20R20 | 8P20L20 | 8P20R20 | 7P21L21 | 7P21R21 | 6P21L21 | 6P21R21 | 6P24L24 | 6P24R24 | 5P25L25 | 5P25R25 | 45P27L27 | 45P27R27 | 4P28L28 | 4P28R28 | 4P32L32 | 4P32R32 | 35P35L35 | 35P35R35 | 3P36L36 | 3P36R36 | 257P36L36 | 257P36R36 | 225P36L36 | 225P36R36 |
|---|----------|----------|-----------|----------|-----------|----------|----------|---------|----------|---------|----------|---------|---------|---------|---------|---------|----------|----------|----------|---------|---------|---------|----------|----------|---------|---------|-----------|-----------|-----------|-----------|
| Figure | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 |
| Gear | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 1.061 | | 1.571 | | 2.086 | | 2.590 | | 3.100 | | 3.665 | | 4.100 | | 5.172 | | 6.201 | | 7.238 | | 8.202 | | 10.262 | | 12.304 | | 14.372 | | 16.430 | |
| Pitch Dia. | 1.000 | | 1.500 | | 2.000 | | 2.500 | | 3.000 | | 3.500 | | 4.000 | | 5.000 | | 6.000 | | 7.000 | | 8.000 | | 10.000 | | 12.000 | | 14.000 | | 16.000 | |
| Pinion | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 1.061 | | 1.571 | | 2.086 | | 2.590 | | 3.100 | | 3.665 | | 4.100 | | 5.172 | | 6.201 | | 7.238 | | 8.202 | | 10.262 | | 12.304 | | 14.372 | | 16.430 | |
| Pitch Dia. | 1.000 | | 1.500 | | 2.000 | | 2.500 | | 3.000 | | 3.500 | | 4.000 | | 5.000 | | 6.000 | | 7.000 | | 8.000 | | 10.000 | | 12.000 | | 14.000 | | 16.000 | |
| Combination | 18 | 18 | 18 | 18 | 20 | 20 | 20 | 20 | 21 | 21 | 21 | 21 | 24 | 24 | 25 | 25 | 27 | 27 | 28 | 28 | 32 | 32 | 35 | 35 | 36 | 36 | 36 | 36 | 36 | 36 |
| Diametral Pitch | 18 | | 12 | | 10 | | 8 | | 7 | | 6 | | 6 | | 5 | | 4½ | | 4 | | 4 | | 3½ | | 3 | | 2.57 | | 2.25 | |
| Face Width | 3/16 | | 5/16 | | 1/2 | | 9/16 | | 11/16 | | 13/16 | | 1 | | 13/16 | | 15/16 | | 1½ | | 1½ | | 17/8 | | 2 | | 2¾ | | 3 | |
| A Mount Dist. | 7/8 | | 15/16 | | 15/8 | | 15/16 | | 2¼ | | 29/16 | | 213/16 | | 37/16 | | 41/8 | | 45/8 | | 3¾ | | 411/16 | | 59/16 | | 7½ | | 8½ | |
| B Bore Length | 15/32 | | 11/16 | | 7/8 | | 1 | | 1½ | | 1¼ | | 13/8 | | 15/8 | | 17/8 | | 2 | | | | | | | | | | | |
| C Bore Dia. ^{+0.005} / _{-0.000} | 3/8 | | 5/8 | | ¾ | | 15/16 | | 11/16 | | 13/16 | | 15/16 | | 17/16 | | 111/16 | | 115/16 | | | | | | | | | | | |
| D Hub Dia. | ¾ | | 1¼ | | 1½ | | 17/8 | | 21/8 | | 2½ | | 2¾ | | 3¼ | | 35/8 | | 4 | | | | | | | | | | | |
| E Hub Length | ¼ | | 7/16 | | 3/8 | | 7/16 | | ½ | | 9/16 | | 9/16 | | 9/16 | | ¾ | | 11/16 | | | | | | | | | | | |
| F Apex to Back | | | | | | | | | | | | | | | | | | | | | 43/8 | | 57/16 | | 6½ | | 8 | | 9¼ | |
| G Bore Dia. ^{+0.001} / _{-0.000} | | | | | | | | | | | | | | | | | | | | | 3¾ | | 5 | | 6½ | | 87/8 | | 10½ | |
| H C'bore Dia. | | | | | | | | | | | | | | | | | | | | | 5½ | | 71/8 | | 85/8 | | 11¼ | | 13 | |
| J Bolt Circle | | | | | | | | | | | | | | | | | | | | | 45/8 | | 6 | | 7½ | | 10 | | 11¾ | |
| K Web Thick. | | | | | | | | | | | | | | | | | | | | | 5/8 | | ¾ | | ¾ | | 2 | | 21/8 | |
| L C'bore Depth | | | | | | | | | | | | | | | | | | | | | 5/8 | | ¾ | | 15/16 | | ½ | | ¾ | |
| M Bore Length | | | | | | | | | | | | | | | | | | | | | 5/16 | | 5/16 | | ¾ | | 1 | | ½ | |
| Holes | Size | | | | | | | | | | | | | | | | | | | | 13/32 | | 17/32 | | 17/32 | | 1/2-20 | | 1/2-20 | |
| | No. | | | | | | | | | | | | | | | | | | | | 12 | | 12 | | 12 | | 10 | | 12 | |
| Keyway | 1/8x1/16 | | 3/16x1/16 | | 3/16x1/16 | | 1/4x3/32 | | 1/4x3/32 | | 1/4x3/32 | | 3/8x1/8 | | 3/8x1/8 | | 3/8x1/8 | | 1/2x3/16 | | | | | | | | | | | |
| **Max. Bore | * | | * | | 7/8 | | 13/16 | | 17/16 | | 111/16 | | 17/8 | | 2½ | | 2¾ | | 27/8 | | * | | * | | * | | * | | * | |
| Wt. per pair, lbs. | .12 | | .40 | | .81 | | 1.25 | | 2.25 | | 3.75 | | 5.37 | | 10.5 | | 16.5 | | 24.5 | | 17.0 | | 30.0 | | 46.0 | | 79.5 | | 108.0 | |
| Torque (lb. in.) | 37 | | 138 | | 405 | | 712 | | 1251 | | 1936 | | 2991 | | 5218 | | 7765 | | 11481 | | 14209 | | 24433 | | 38404 | | 69158 | | 95307 | |

Note: All dimensions are in inches.

*Cannot be reworked.

**Keyway Unchanged

Figure 5

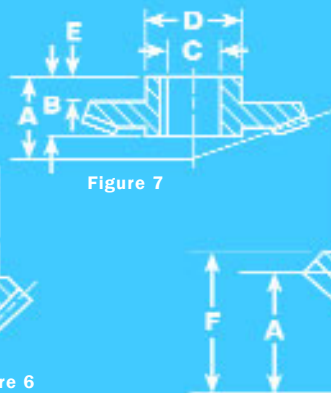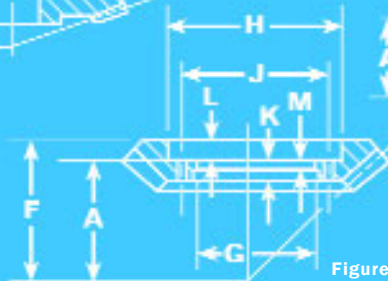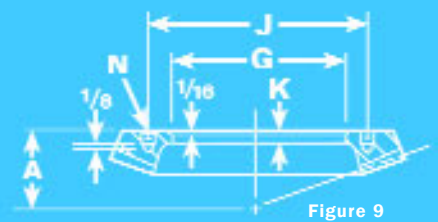Figure 7

Figure 6

Figure 8

Figure 9



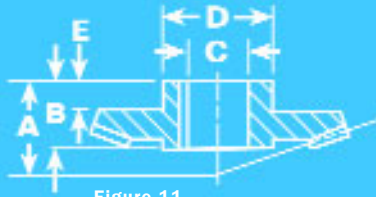

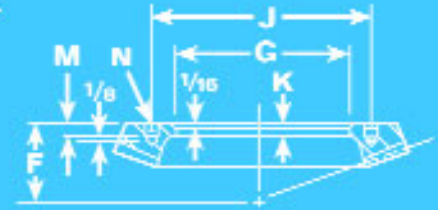
| Part No. | 10P32L16 | 10P16R32 | 9P34L17 | 9P17R34 | 8P36L18 | 8P18R36 | 7P38L19 | 7P19R38 | 6P40L20 | 6P20R40 | 5P40L20 | 5P20R40 | 4P40L20 | 4P20R40 | 35P42L21 | 35P21R42 | 320P46L23 | 320P23R46 |
|---|---------------|----------|-----------|----------|-----------|---------|----------|---------|---------|---------|---------|----------|----------|---------|----------|----------|-----------|-----------|
| Figure | 5 | 6 | 5 | 6 | 5 | 7 | 5 | 7 | 6 | 7 | 6 | 7 | 6 | 8 | 6 | 8 | 6 | 9 |
| Gear | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 3.200 | | 3.783 | | 4.518 | | 5.457 | | 6.699 | | 8.053 | | 9.985 | | 12.069 | | 14.413 | |
| Pitch Dia. | 3.200 | | 3.778 | | 4.500 | | 5.429 | | 6.667 | | 8.000 | | 10.000 | | 12.000 | | 14.362 | |
| Pinion | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 1.764 | | 2.087 | | 2.457 | | 2.965 | | 3.620 | | 4.404 | | 5.436 | | 6.517 | | 7.760 | |
| Pitch Dia. | 1.600 | | 1.889 | | 2.250 | | 2.714 | | 3.333 | | 4.000 | | 5.000 | | 6.000 | | 7.181 | |
| Combination | 16 | 32 | 17 | 34 | 18 | 36 | 19 | 38 | 20 | 40 | 20 | 40 | 20 | 40 | 21 | 42 | 23 | 46 |
| Diametral Pitch | 10 | | 9 | | 8 | | 7 | | 6 | | 5 | | 4 | | 3½ | | 3¼ | |
| Face Width | 9/16 | | 5/8 | | 13/16 | | 1 | | 13/16 | | 17/16 | | 1¾ | | 2 | | 2¾ | |
| A Mount Dist. | 17/8 | 111/16 | 2¼ | 115/16 | 29/16 | 21/16 | 3 | 27/16 | 311/16 | 215/16 | 47/16 | 3½ | 5½ | 29/16 | 69/16 | 31/8 | 77/8 | 47/16 |
| B Bore Length | ¾ | 1 | 7/8 | 11/8 | 1 | 13/8 | 11/8 | 15/8 | 13/8 | 17/8 | 15/8 | 2¼ | 2 | | 2¼ | | 215/16 | |
| C Bore Dia. <small>+0.0005 -0.0000</small> | 5/8 | 15/16 | ¾ | 11/16 | 7/8 | 15/16 | 11/16 | 17/16 | 15/16 | 111/16 | 19/16 | 21/16 | 113/16 | | 21/16 | | 25/8 | |
| D Hub Dia. | 1¼ | 17/8 | 1½ | 21/8 | 1¾ | 2½ | 21/8 | 27/8 | 2¾ | 31/8 | 27/8 | 33/8 | 3¾ | | 37/8 | | 4½ | |
| E Hub Length | 3/16 | 9/16 | ¼ | 9/16 | 3/16 | 9/16 | 1/8 | 5/8 | ¼ | 13/16 | ¼ | 15/16 | 5/16 | | 5/16 | | ¼ | |
| F Apex to Back | | | | | | | | | | | | | | 33/16 | | 37/8 | | |
| G Bore Dia. <small>+0.001 -0.000</small> | | | | | | | | | | | | | | 5 | | 5¾ | | 9¼ |
| H C'bore Dia. | | | | | | | | | | | | | | 65/8 | | 8 | | |
| J Bolt Circle | | | | | | | | | | | | | | 5¾ | | 67/8 | | 10½ |
| K Web Thick | | | | | | | | | | | | | | 5/8 | | ¾ | | ¾ |
| L C'bore Depth | | | | | | | | | | | | | | 5/8 | | ¾ | | |
| M Bore Length | | | | | | | | | | | | | | 5/16 | | 5/16 | | |
| Holes N | Size | | | | | | | | | | | | | | | | | |
| | No. | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | 13/32 | | 17/32 | | 1/2-20 a |
| | | | | | | | | | | | | | | 12 | | 12 | | 12 |
| Keyway | 3/16x1/16 | 1/4x3/32 | 3/16x1/16 | 1/4x3/32 | 3/16x1/16 | 3/8x1/8 | 1/4x3/32 | 3/8x1/8 | 3/8x1/8 | 3/8x1/8 | 3/8x1/8 | 1/2x3/16 | 1/2x3/16 | | 1/2x3/16 | | 5/8x7/32 | |
| **Max. Bore | * | 13/16 | 7/8 | 17/16 | 1 | 1½ | 13/16 | 2 | 15/8 | 2¼ | 17/8 | 2¾ | 2½ | * | 27/8 | * | 3 | 9¼ |
| Wt. each, lbs. | .25 | 1.12 | .50 | 1.75 | .62 | 2.87 | 1.00 | 5.00 | 2.00 | 8.00 | 3.50 | 14.00 | 6.75 | 13.75 | 11.25 | 24.50 | 20 | 30 |
| Torque (lb. in.) | Gear | | 820 | | 1288 | | 2352 | | 3962 | | 6674 | | 11116 | | 19996 | | 31474 | |
| | Pinion | | 410 | | 644 | | 1176 | | 1981 | | 3337 | | 5558 | | 9998 | | 15737 | |

Note: All dimensions are in inches.

*Cannot be reworked.

**Keyway Unchanged

a - ¾ thread length

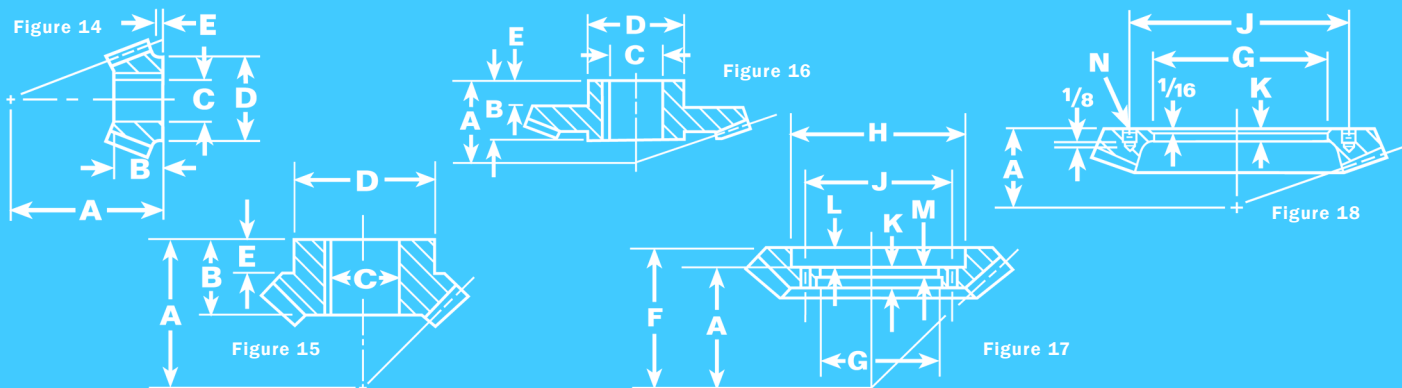

Figure 10

Figure 11

Figure 12

Figure 13

| Part No. | 10P45L15 | 10P15R45 | 8P45L15 | 8P15R45 | 7P45L15 | 7P15R45 | 6P45L15 | 6P15R45 | 55P48L16 | 55P16R48 | 5P48L16 | 5P16R48 | 45P51L17 | 45P17R51 | 4P54L18 | 4P18R54 | 338P54L18 | 338P18R54 |
|---|------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Figure | 10 | 11 | 10 | 11 | 10 | 13 | 10 | 13 | 10 | 13 | 10 | 13 | 10 | 13 | 10 | 13 | 12 | 13 |
| Gear | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 4.492 | | 5.627 | | 6.438 | | 7.514 | | 8.725 | | 9.625 | | 11.364 | | 13.523 | | 16.015 | |
| Pitch Dia. | 4.500 | | 5.625 | | 6.429 | | 7.500 | | 8.727 | | 9.600 | | 11.333 | | 13.500 | | 16.000 | |
| Pinion | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 1.716 | | 2.138 | | 2.462 | | 2.882 | | 3.283 | | 3.611 | | 4.304 | | 5.021 | | 5.964 | |
| Pitch Dia. | 1.500 | | 1.875 | | 2.143 | | 2.500 | | 2.909 | | 3.200 | | 3.778 | | 4.500 | | 5.333 | |
| Combination | 15 | 45 | 15 | 45 | 15 | 45 | 15 | 45 | 16 | 48 | 16 | 48 | 17 | 51 | 18 | 54 | 18 | 54 |
| Diametral Pitch | 10 | | 8 | | 7 | | 6 | | 5½ | | 5 | | 4½ | | 4 | | 3¾ | |
| Face Width | 1⅛ | | 1⅜ | | 1 | | 1⅛ | | 1¼ | | 1½ | | 1¾ | | 2 | | 2½ | |
| A Mount Dist. | 2¾ | 1⅝ | 2⅝ | 2 | 3½ | | 3⅝ | | 4⅞ | | 5⅛ | | 5⅝ | | 7⅛ | | 8¾ | |
| B Bore Length | ¾ | 1⅛ | ⅞ | 1⅜ | 1¼ | | 1⅜ | | 1⅜ | | 1⅝ | | 1⅞ | | 2⅛ | | 2⅝ | |
| C Bore Dia. <small>+0.005 -0.000</small> | ⅝ | 1⅛ | ¾ | 1⅝ | 1⅝ | | 1⅜ | | 1⅝ | | 1⅞ | | 1⅞ | | 1⅝ | | 2⅝ | |
| D Hub Dia. | 1¼ | 2⅛ | 1½ | 2⅜ | 1⅞ | | 2⅛ | | 2½ | | 2⅞ | | 3⅛ | | 3½ | | 3½ | |
| E Hub Length | ⅞ | 7/16 | 1/16 | ⅝ | 3/16 | | 1/8 | | 1/8 | | 3/16 | | 1/8 | | 1/8 | | 1/4 | |
| F Mount Dist. | | | | | | 1¾ | | 1⅝ | | 2⅞ | | 2⅝ | | 2⅞ | | 3⅞ | | 3¾ |
| G Bore Dia. <small>+0.001 -0.000</small> | | | | | | 3¾ | | 4½ | | 5¼ | | 5¾ | | 7 | | 8½ | | 10¾ |
| J Bolt Circle | | | | | | 4⅞ | | 5⅞ | | 6⅞ | | 7⅞ | | 8⅞ | | 10 | | 12 |
| K Web Thick. | | | | | | ½ | | ½ | | ½ | | ½ | | ½ | | ½ | | ¾ |
| M Thread Length | | | | | | 7/16 | | 7/16 | | 1/2 | | 1/2 | | ¾ | | ¾ | | 7/8 |
| Screw N | Size | | | | | 5/16-24 | | 5/16-24 | | 3/8-24 | | 3/8-24 | | 1/2-20 | | 1/2-20 | | 1/2-20 |
| | No. Req'd | | | | | 6 | | 6 | | 8 | | 8 | | 10 | | 10 | | 12 |
| Keyway | 3/16x1/16 | 1/4x3/32 | 3/16x1/16 | 3/8x1/8 | 1/4x3/32 | | 1/4x3/32 | | 3/8x1/8 | | 3/8x1/8 | | 3/8x1/8 | | 1/2x3/16 | | 5/8x7/32 | |
| **Max. Bore | * | 17/16 | * | 1½ | * | * | * | * | * | * | * | * | 1⅞ | * | 2¼ | * | 2⅝ | 10¾ |
| Wt. each, lbs. | .25 | 2.50 | .50 | 4.00 | .75 | 3.88 | 1.00 | 5.12 | 1.5 | 7.5 | 2.25 | 9.62 | 3.50 | 16.50 | 5.75 | 22.50 | 10 | 37.5 |
| Torque (lb. in.) | Gear | 1621 | | 2993 | | 4812 | | 7143 | | 10405 | | 14752 | | 23039 | | 35446 | | 67622 |
| | Pinion | 540 | | 998 | | 1604 | | 2381 | | 3468 | | 4917 | | 7680 | | 11815 | | 22541 |

Note: All dimensions are in inches.

*Cannot be reworked.

**Keyway Unchanged






| Part No. | 8P24L16 | 8P16R24 | 7P24L16 | 7P16R24 | 6P24L16 | 6P16R24 | 6P30L20 | 6P20R30 | 5P30L20 | 5P20R30 | 5P36L24 | 5P24R36 | 45P39L26 | 45P26R39 | 4P42L28 | 4P28R42 | 35P45L30 | 35P30R45 | 290P45L30 | 290P30R45 |
|---|---------------|----------|----------|----------|----------|----------|----------|---------|---------|---------|---------|----------|----------|----------|---------|---------|----------|----------|-----------|-----------|
| Figure | 14 | 15 | 14 | 15 | 14 | 15 | 15 | 16 | 15 | 16 | 15 | 16 | 15 | 17 | 17 | 17 | 17 | 17 | 15 | 18 |
| Gear | | | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 3.037 | | 3.496 | | 4.070 | | 5.067 | | 6.080 | | 7.278 | | 8.722 | | 10.589 | | 12.943 | | 15.639 | |
| Pitch Dia. | 3.000 | | 3.429 | | 4.000 | | 5.000 | | 6.000 | | 7.200 | | 8.667 | | 10.500 | | 12.857 | | 15.500 | |
| Pinion | | | | | | | | | | | | | | | | | | | | |
| Outside Dia. | 2.169 | | 2.506 | | 2.930 | | 3.578 | | 4.290 | | 5.094 | | 6.065 | | 7.355 | | 8.960 | | 10.908 | |
| Pitch Dia. | 2.000 | | 2.286 | | 2.667 | | 3.333 | | 4.000 | | 4.800 | | 5.778 | | 7.000 | | 8.571 | | 10.334 | |
| Combination | 16 | 24 | 16 | 24 | 16 | 24 | 20 | 30 | 20 | 30 | 24 | 36 | 26 | 39 | 28 | 42 | 30 | 45 | 30 | 45 |
| Diametral Pitch | 8 | | 7 | | 6 | | 6 | | 5 | | 5 | | 4½ | | 4 | | 3½ | | 2.903 | |
| Face Width | ⅝ | | 1⅛ | | 1⅜ | | 1 | | 1⅛ | | 1¼ | | 1⅜ | | 1¾ | | 2 | | 2¾ | |
| A Mount Dist. | 1⅝ | 1¾ | 2⅜ | 2 | 2½ | 2¼ | 3 | 2¾ | 3½ | 3⅜ | 4¼ | 3⅞ | 5⅜ | 2⅞ | 4⅛ | 3⅝ | 5⅜ | 4⅜ | 8⅝ | 6⅜ |
| B Bore Length | ⅞ | 1 | 1 | 1⅛ | 1⅛ | 1¼ | 1¼ | 1⅝ | 1⅝ | 1⅞ | 1⅝ | 2 | 1⅞ | | | | | | 3¼ | |
| C Bore Dia. <small>+0.0005 -0.0000</small> | ¾ | 15/16 | 15/16 | 11/16 | 11/16 | 13/16 | 13/16 | 17/16 | 15/16 | 11/16 | 17/16 | 115/16 | 111/16 | | | | | | 3⅜ | |
| D Hub Dia. | 1½ | 1⅞ | 1⅞ | 2⅛ | 2⅛ | 2⅜ | 2⅜ | 2⅞ | 2¾ | 3⅛ | 3¼ | 3½ | 3⅝ | | | | | | 6 | |
| E Hub Length | ¼ | 7/16 | 5/16 | 7/16 | 7/16 | 9/16 | 5/16 | 11/16 | 5/16 | 11/16 | 3/8 | 9/16 | 9/16 | | | | | | ½ | |
| F Apex to Back. | | | | | | | | | | | | | | 3½ | 5⅞ | 4 | 6⅜ | 4⅞ | | |
| G Bore Dia. <small>+0.001 -0.000</small> | | | | | | | | | | | | | | 4¼ | 3¼ | 5½ | 4 | 6½ | | 10 |
| H C' bore Dia. | | | | | | | | | | | | | | 6 | 4⅞ | 7¼ | 6 | 8⅞ | | |
| J Bolt Circle | | | | | | | | | | | | | | 5⅛ | 4 | 6⅜ | 4⅞ | 7¾ | | 11½ |
| K Web Thick. | | | | | | | | | | | | | | 5/8 | 7/8 | 5/8 | 7/8 | ¾ | | 5/8 |
| L C' Bore Dia. | | | | | | | | | | | | | | 5/8 | 7/8 | 11/16 | 1 | ¾ | | |
| M Bore Length | | | | | | | | | | | | | | 5/16 | 5/16 | 5/16 | 5/16 | 5/16 | | |
| Holes | Size | | | | | | | | | | | | | 13/32 | 13/32 | 13/32 | 17/32 | 17/32 | | 1/2-20a |
| | No. | | | | | | | | | | | | | 12 | 12 | 12 | 12 | 12 | | 12 |
| Keyway | 3/16x1/16 | 1/4x3/32 | 1/4x3/32 | 1/4x3/32 | 1/4x3/32 | 1/4x3/32 | 1/4x3/32 | 3/8x1/8 | 3/8x1/8 | 3/8x1/8 | 3/8x1/8 | 1/2x3/16 | 3/8x1/8 | | | | | | 7/8x5/16 | |
| **Max. Bore | * | 13/16 | * | 19/16 | * | 111/16 | 111/16 | 1⅝ | 1⅞ | 2¼ | 2½ | 2⅝ | 2¾ | * | * | * | * | * | 4⅜ | 10 |
| Wt. each, lbs. | .38 | 1.00 | .75 | 1.62 | 1.00 | 2.25 | 1.63 | 4.37 | 3.38 | 6.25 | 5.25 | 11.50 | 8.62 | 9.50 | 8.25 | 14.00 | 13.50 | 25.50 | 44.5 | 45 |
| Torque (lb. in.) | Gear | 902 | | 1295 | | 2084 | | 3850 | | 5960 | | 8658 | | 13122 | | 23370 | | 37958 | | 81825 |
| | Pinion | 601 | | 863 | | 1389 | | 2567 | | 3973 | | 5772 | | 8748 | | 15580 | | 25305 | | 54550 |

Note: All dimensions are in inches.

*Cannot be reworked.

**Keyway Unchanged

a - 7/8 thread length

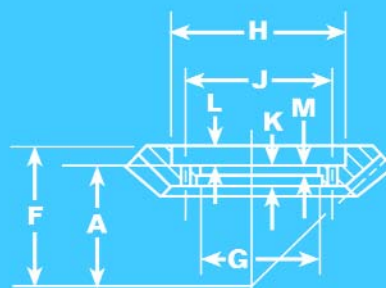
Figure 19

Figure 20

Figure 21

| Part No. | | 8P28L21 | 8P21R28 | 7P28L21 | 7P21R28 | 6P32L24 | 6P24R32 | 5P32L24 | 5P24R32 | 4P32L24 | 4P24R32 | 35P36L27 | 35P27R36 | 3P36L27 | 3P27R36 |
|---|--------|----------|----------|----------|----------|---------|---------|---------|---------|----------|---------|----------|----------|---------|---------|
| Figure | | 19 | 19 | 19 | 19 | 19 | 20 | 19 | 20 | 19 | 21 | 21 | 21 | 21 | 21 |
| Gear | | | | | | | | | | | | | | | |
| Outside Dia. | | 3.548 | | 4.068 | | 5.379 | | 6.503 | | 8.084 | | 10.434 | | 12.152 | |
| Pitch Dia. | | 3.500 | | 4.000 | | 5.333 | | 6.400 | | 8.000 | | 10.286 | | 12.000 | |
| Pinion | | | | | | | | | | | | | | | |
| Outside Dia. | | 2.789 | | 3.186 | | 4.219 | | 5.053 | | 6.288 | | 8.117 | | 9.424 | |
| Pitch Dia. | | 2.625 | | 3.000 | | 4.000 | | 4.800 | | 6.000 | | 7.714 | | 9.000 | |
| Combination | | 21 | 28 | 21 | 28 | 24 | 32 | 24 | 32 | 24 | 32 | 27 | 36 | 27 | 36 |
| Diametral Pitch | | 8 | | 7 | | 6 | | 5 | | 4 | | 3½ | | 3 | |
| Face Width | | 1⅛ | | ¾ | | 1 | | 1¼ | | 1½ | | 1¾ | | 2 | |
| A Mount Dist. | | 2¼ | 2⅝ | 2⅝ | 27⁄16 | 3⅜ | 3 | 315⁄16 | 37⁄16 | 415⁄16 | 27⁄8 | 4¾ | 3¾ | 57⁄16 | 47⁄16 |
| B Bore Length | | 1 | 1⅝ | 1⅝ | 1¼ | 1⅜ | 1⅝ | 1⅝ | 17⁄8 | 2 | | | | | |
| C Bore Dia. ^{+0.0005} _{-0.0000} | | 15⁄16 | 11⁄16 | 11⁄16 | 13⁄16 | 15⁄16 | 17⁄16 | 17⁄16 | 111⁄16 | 113⁄16 | | | | | |
| D Hub Dia. | | 17⁄8 | 2⅝ | 2⅝ | 2⅜ | 2¾ | 27⁄8 | 3¼ | 3⅝ | 3¾ | | | | | |
| E Hub Length | | ¾ | ½ | 7⁄16 | 9⁄16 | 7⁄16 | 9⁄16 | 7⁄16 | 9⁄16 | 5⁄8 | | | | | |
| F Apex to Back. | | | | | | | | | | | 3½ | 5½ | 4½ | 6½ | 5⅜ |
| G Bore Dia. ^{+0.001} _{-0.000} | | | | | | | | | | | 3¾ | 3½ | 5 | 4 | 6 |
| H C'bore Dia. | | | | | | | | | | | 5⅜ | 5⅝ | 7¼ | 6 | 8⅝ |
| J Bolt Circle | | | | | | | | | | | 4½ | 4¼ | 6⅝ | 47⁄8 | 7 |
| K Web Thick. | | | | | | | | | | | 5⁄8 | ¾ | ¾ | ¾ | ¾ |
| L C'bore Depth | | | | | | | | | | | 5⁄8 | ¾ | ¾ | 1⅛ | ¾ |
| M Bore Length | | | | | | | | | | | 5⁄16 | 5⁄16 | 5⁄16 | 5⁄16 | 5⁄16 |
| Holes | Size | | | | | | | | | | 13⁄32 | 13⁄32 | 17⁄32 | 17⁄32 | 17⁄32 |
| | No. | | | | | | | | | | 12 | 12 | 12 | 12 | 12 |
| Keyway | | 1⁄4x3⁄32 | 1⁄4x3⁄32 | 1⁄4x3⁄32 | 1⁄4x3⁄32 | 3⁄8x1⁄8 | 3⁄8x1⁄8 | 3⁄8x1⁄8 | 3⁄8x1⁄8 | 1⁄2x3⁄16 | | | | | |
| **Max. Bore | | 13⁄16 | 17⁄16 | 19⁄16 | 111⁄16 | 2 | 2 | 2⅝ | 2⅝ | 2¾ | * | * | * | * | * |
| Wt. each, lbs. | | 1.00 | 1.50 | 1.25 | 2.38 | 3.00 | 5.25 | 5.12 | 8.28 | 9.38 | 8.12 | 10.25 | 15.75 | 16.00 | 24.00 |
| Torque (lb. in.) | Gear | 1469 | | 2025 | | 4324 | | 7435 | | 13185 | | 23356 | | 34959 | |
| | Pinion | 1102 | | 1519 | | 3243 | | 5576 | | 9889 | | 17517 | | 26219 | |

Note: All dimensions are in inches.

*Cannot be reworked.

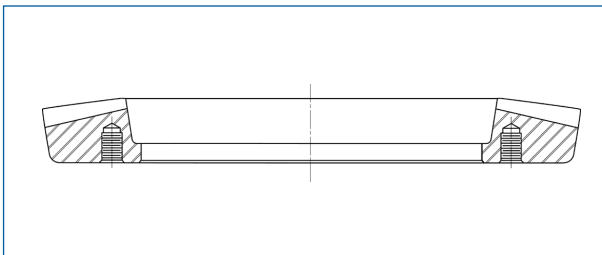
**Keyway Unchanged

ARROW-STAN® Standard (Non-Stock) Ratios

The combinations listed in the following pages represent a line of Spiral Bevel Gears in sizes larger than our general selection of stock gears. We are tooled to produce these gear combinations without undue delays other than the normal time needed for the machining processes.

They are listed in groups according to the Pitch Diameter of the **gear**, with a suitable selection of ratios to cover a wide range of applications. (Please contact our Design Engineering Department for other sizes and ratios.)

All ring gears are carburized and **die quenched** on the most modern type of equipment available, and kept to the closest possible limits of flatness and roundness.



Arrow-Stan gear style used on ring gears.

As in our stock gear line, capacities are rated in terms of torque. The allowable torque, as shown on page 4, must be calculated before selecting gear size.

Ring gears should be ordered as shown in the following tables to take advantage of extensive tooling available. Pinion members can be designed to suit your machine or housing. Pinions of ratios higher than 3:1 are usually designed integral with the shaft because of fastening problems.

14 INCH PITCH DIAMETER OF GEAR

| SIZES | | | | SPECIFICATION | | | | | | DESIGN | | | | CAPACITY | |
|--------|--------|------------|--------|---------------|-------------|-------------|------------|-------------------|---------------|--------|------------------|--------------|-----------|------------------------------------|----------------------------------|
| O.D. | | Pitch Dia. | | Ratio | Combination | Diam. Pitch | Face Width | Mounting Distance | | Bore | Bolt Circle Dia. | No. of Bolts | Bolt Size | Torque Pinion <i>Lb. Inches</i> | Torque Gear <i>Lb. Inches</i> |
| Gear | Pinion | Gear | Pinion | | | | | Gear | Pinion (Min.) | | | | | | |
| 14.027 | 5.973 | 14 | 5.50 | 2.55 | 22-56 | 4.00 | 2¼ | 3½ | 7¾ | 9.250 | 10.500 | 12 | ½-20 | 16950 | 43145 |
| 14.030 | 5.220 | 14 | 4.75 | 2.95 | 20-59 | 4.21 | 2¼ | 3¼ | 7¾ | 9.250 | 10.500 | 12 | ½-20 | 14183 | 41840 |
| 14.019 | 3.993 | 14 | 3.55 | 3.94 | 17-67 | 4.79 | 2¼ | 2¾ | 7½ | 9.250 | 10.500 | 12 | ½-20 | 9839 | 38777 |
| 13.990 | 3.517 | 14 | 3.09 | 4.53 | 15-68 | 4.86 | 2¼ | 2⅝ | 7½ | 9.250 | 10.500 | 12 | ½-20 | 8367 | 37930 |

16 INCH PITCH DIAMETER OF GEAR

| | | | | | | | | | | | | | | | |
|--------|-------|----|------|------|-------|------|----|----|----|--------|--------|----|------|-------|-------|
| 16.040 | 6.837 | 16 | 6.28 | 2.55 | 22-56 | 3.50 | 2½ | 4 | 8½ | 10.750 | 12.000 | 12 | ½-20 | 23790 | 60556 |
| 15.950 | 4.599 | 16 | 4.06 | 3.94 | 17-67 | 4.19 | 2½ | 3 | 8½ | 10.750 | 12.000 | 12 | ½-20 | 13810 | 54428 |
| 16.019 | 3.720 | 16 | 3.24 | 4.93 | 15-74 | 4.63 | 2½ | 2⅞ | 8½ | 10.750 | 12.000 | 12 | ½-20 | 10380 | 51208 |

18 INCH PITCH DIAMETER OF GEAR

| SIZES | | | | SPECIFICATION | | | | | | DESIGN | | | | CAPACITY | |
|--------|--------|------------|--------|---------------|------------------|----------------|---------------------------------|----------------------|------------------|--------|------------------------|--------------------|--------------|---------------------------------------|-------------------------------------|
| O.D. | | Pitch Dia. | | Ratio | Combi- nation | Diam. Pitch | Face Width | Mounting Distance | | Bore | Bolt Circle Dia. | No. of Bolts | Bolt Size | Torque Pinion <i>Lb. Inches</i> | Torque Gear <i>Lb. Inches</i> |
| Gear | Pinion | Gear | Pinion | | | | | Gear | Pinion (Min.) | | | | | | |
| 18.196 | 18.196 | 18 | 18 | 1.00 | 39-39 | 2.17 | 3 ¹⁹ / ₁₆ | 10 | 10 | 10.750 | 13.375 | 12 | ½-20 | 147373 | 147373 |
| 18.062 | 7.980 | 18 | 7.33 | 2.46 | 22-54 | 3.00 | 2¾ | 4¾ | 9½ | 12.500 | 14.125 | 12 | ½-20 | 33827 | 83030 |
| 18.015 | 6.558 | 18 | 5.89 | 3.06 | 18-55 | 3.06 | 2¾ | 4 | 9½ | 12.500 | 14.125 | 12 | ½-20 | 26219 | 80114 |
| 18.013 | 5.235 | 18 | 4.58 | 3.93 | 15-59 | 3.28 | 2¾ | 3½ | 9¼ | 12.500 | 14.125 | 12 | ½-20 | 19457 | 76531 |
| 18.034 | 4.235 | 18 | 3.65 | 4.93 | 14-69 | 3.83 | 2¾ | 3 | 9¼ | 12.500 | 14.125 | 12 | ½-20 | 14362 | 70784 |

20 INCH PITCH DIAMETER OF GEAR

| | | | | | | | | | | | | | | | |
|--------|--------|----|------|------|-------|------|----|----|-----|--------|--------|----|------|--------|--------|
| 20.218 | 20.218 | 20 | 20 | 1.00 | 39-39 | 1.95 | 4¼ | 11 | 11 | 12.500 | 14.625 | 12 | ⅝-18 | 196902 | 196902 |
| 20.086 | 8.795 | 20 | 8 | 2.5 | 20-50 | 2.50 | 3 | 5¼ | 10½ | 13.875 | 15.500 | 12 | ⅝-18 | 44196 | 110490 |
| 20.025 | 7.987 | 20 | 7.47 | 2.68 | 28-75 | 3.75 | 3 | 4¾ | 10½ | 13.875 | 15.500 | 12 | ⅝-18 | 36101 | 96702 |
| 20.026 | 7.466 | 20 | 6.93 | 2.88 | 26-75 | 3.75 | 3 | 4½ | 10½ | 13.875 | 15.500 | 12 | ⅝-18 | 33291 | 96032 |
| 20.023 | 6.318 | 20 | 5.71 | 3.50 | 20-70 | 3.50 | 3 | 4 | 10½ | 13.875 | 15.500 | 12 | ⅝-18 | 27588 | 96558 |
| 20.015 | 5.641 | 20 | 5.07 | 3.95 | 19-75 | 3.75 | 3 | 3½ | 10½ | 13.875 | 15.500 | 12 | ⅝-18 | 23520 | 92842 |
| 20.012 | 4.856 | 20 | 4.27 | 4.69 | 16-75 | 3.75 | 3 | 3¼ | 10½ | 13.875 | 15.500 | 12 | ⅝-18 | 19418 | 91022 |

22 INCH PITCH DIAMETER OF GEAR


| | | | | | | | | | | | | | | | |
|--------|--------|----|------|------|-------|------|---------------------------------|-----|-----|--------|--------|----|------|--------|--------|
| 22.175 | 22.175 | 22 | 22 | 1.0 | 39-39 | 1.77 | 4 ⁴³ / ₆₄ | 12¼ | 12¼ | 13.875 | 16.000 | 12 | ¾-16 | 255914 | 255914 |
| 22.079 | 8.069 | 22 | 7.33 | 3.00 | 21-63 | 2.86 | 3¼ | 4¾ | 11½ | 15.000 | 17.000 | 12 | ¾-16 | 43419 | 130257 |
| 22.042 | 6.171 | 22 | 5.50 | 4.00 | 18-72 | 3.27 | 3¼ | 4 | 11½ | 15.000 | 17.000 | 12 | ¾-16 | 30092 | 120372 |
| 22.012 | 5.633 | 22 | 4.99 | 4.41 | 17-75 | 3.41 | 3¼ | 3¾ | 11½ | 15.000 | 17.000 | 12 | ¾-16 | 26602 | 117362 |
| 22.010 | 5.057 | 22 | 4.40 | 5.00 | 15-75 | 3.41 | 3¼ | 3½ | 11½ | 15.000 | 17.000 | 12 | ¾-16 | 23122 | 115610 |

24 INCH PITCH DIAMETER OF GEAR

| | | | | | | | | | | | | | | | |
|--------|--------|----|-------|------|-------|------|--------------------------------|-----|-----|--------|--------|----|------|--------|--------|
| 24.243 | 24.243 | 24 | 24 | 1.00 | 42-42 | 1.75 | 5 ⁷ / ₆₄ | 13¼ | 13¼ | 15.250 | 17.000 | 12 | ¾-16 | 319016 | 319016 |
| 24.045 | 11.932 | 24 | 11.37 | 2.11 | 36-76 | 3.17 | 3¼ | 6¾ | 12½ | 17.500 | 19.500 | 12 | ¾-16 | 69528 | 146781 |
| 24.041 | 9.667 | 24 | 9.00 | 2.67 | 27-72 | 3.00 | 3¼ | 5½ | 12½ | 17.500 | 19.500 | 12 | ¾-16 | 54907 | 146419 |
| 24.048 | 8.586 | 24 | 7.73 | 3.11 | 19-59 | 2.46 | 3¼ | 5 | 12½ | 17.500 | 19.500 | 12 | ¾-16 | 49704 | 154344 |
| 24.027 | 8.146 | 24 | 7.44 | 3.23 | 22-71 | 2.96 | 3¼ | 5 | 12½ | 17.500 | 19.500 | 12 | ¾-16 | 44722 | 144330 |
| 24.012 | 7.585 | 24 | 6.86 | 3.50 | 20-70 | 2.92 | 3¼ | 4½ | 12½ | 17.500 | 19.500 | 12 | ¾-16 | 41120 | 143920 |
| 23.985 | 6.141 | 24 | 5.44 | 4.41 | 17-75 | 3.13 | 3¼ | 4 | 12½ | 17.500 | 19.500 | 12 | ¾-16 | 30977 | 136667 |

Now...from the spiral bevel gear specialists

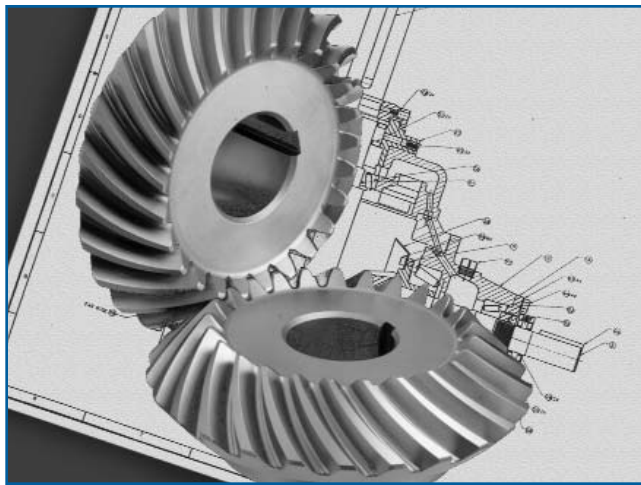GROUND TOOTH SPIRAL BEVEL GEARS ...FROM STOCK



Arrow Gear Company was the first gear manufacturer to offer ground tooth spiral bevel gears . . . from stock. The most popular sizes of 1:1 and 2:1 ratios are currently available for time-saving, off-the-shelf delivery.

Every stock ground tooth gear is designed and manufactured to fulfill the following requirements for discriminating gear buyers.

Speeds in Excess of 8,000 SFPM

Ground tooth spiral bevel gears should be used for speeds exceeding 8000 surface feet per minute. Ground tooth spiral bevel gears make velocity factor devaluation unnecessary. (See page 4.) A constant velocity factor of 1.00 means you transmit more torque or horsepower . . . up to 30% more with the same size gear and pinion.

Reduce Gear Noise

Ground tooth spiral bevel gears are a design "must" at high speeds to reduce the decibel level of your gear box. Tooth contact ratios are maintained to a minimum of 2.0 to assure quiet operations.

Eliminate Positioning Errors

To achieve near "zero" positioning error, designers and manufacturers of radar systems, navigational gear, printing presses and machine tools specify ground tooth spiral bevel gears.

Higher Quality

All Arrow ground tooth spiral bevel gears are manufactured to AGMA Quality Number 11 or better.

High Capacity

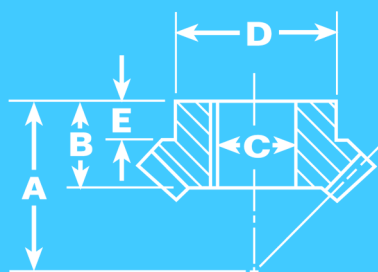
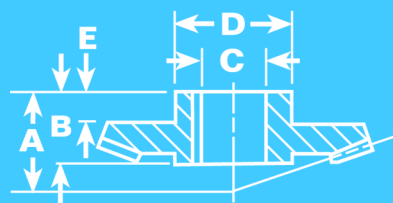
Have your gear capacity requirements outgrown your present housing and mountings? Eliminate unnecessary redesigning or gear box size increases. Investigate the possible use of ground tooth spiral bevel gears for increased capacity. All Arrow ground tooth gears are shot peened for additional fatigue life.

Uniform Load-Carrying Capabilities

Grinding gear teeth corrects heat treat distortion to minimize tooth spacing errors and increase load capacity.

Arrow's On Demand Program for Ground Tooth Spiral Bevel Gears

Arrow is able to produce ground tooth spiral bevel gears from a wide variety of our stock gears, and do so in a fraction of the time when compared to producing a ground tooth gear from scratch. This ability promises to offer many benefits to manufacturers of power transmission systems.

1 TO 1 RATIO

Figure 22
2 TO 1 RATIO

Figure 23

| Part No. | 35GT35L35 | 35GT35R35 | 40GT35L35 | 40GT35R35 | 50GT35L35 | 50GT35R35 | 60GT35L35 | 60GT35R35 | 45GT46L23 | 45GT23R46 | 54GT40L20 | 54GT20R40 | 67GT46L23 | 67GT23R46 |
|--|-----------------------------------|-----------|----------------------------------|-----------|----------------------------------|-----------|----------------------------------|-----------|------------------------------------|-----------|----------------------------------|-----------------------------------|----------------------------------|----------------------------------|
| | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 22 | 23 | 22 | 23 | 22 | 23 |
| Gear | | | | | | | | | | | | | | |
| Outside Dia. | 3.560 | | 4.075 | | 5.110 | | 6.144 | | 4.518 | | 5.446 | | 6.664 | |
| Pitch Dia. | 3.500 | | 4.000 | | 5.000 | | 6.000 | | 4.500 | | 5.429 | | 6.667 | |
| Pinion | | | | | | | | | | | | | | |
| Outside Dia. | 3.560 | | 4.075 | | 5.110 | | 6.144 | | 2.424 | | 2.935 | | 3.596 | |
| Pitch Dia. | 3.500 | | 4.000 | | 5.000 | | 6.000 | | 2.250 | | 2.714 | | 3.333 | |
| Combination | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 35 | 23 | 46 | 20 | 40 | 23 | 46 |
| Diametral Pitch | 10 | | 8.75 | | 7 | | 5.833 | | 10.222 | | 7.368 | | 6.9 | |
| Face Width | 1 ¹³ / ₁₆ | | 1 | | 1 ³ / ₁₆ | | 1 ⁵ / ₁₆ | | 1 ³ / ₁₆ | | 1 | | 1 ³ / ₁₆ | |
| A Mount Dist. | 2 ⁹ / ₁₆ | | 2 ¹³ / ₁₆ | | 3 ⁷ / ₁₆ | | 4 ¹ / ₈ | | 2 ⁹ / ₁₆ | | 2 ¹ / ₁₆ | 3 | 2 ⁷ / ₁₆ | 3 ¹¹ / ₁₆ |
| B Bore Length | 1 ¹ / ₄ | | 1 ³ / ₈ | | 1 ⁵ / ₈ | | 1 ⁷ / ₈ | | 1 | | 1 ³ / ₈ | 1 ¹ / ₈ | 1 ⁵ / ₈ | 1 ⁷ / ₈ |
| C Bore Dia. ^{+0.005} / _{-0.000} | 1 ³ / ₁₆ | | 1 ⁵ / ₁₆ | | 1 ⁷ / ₁₆ | | 1 ¹¹ / ₁₆ | | 7/ ₈ | | 1 ⁵ / ₁₆ | 1 ¹ / ₁₆ | 1 ⁷ / ₁₆ | 1 ¹¹ / ₁₆ |
| D Hub Dia. | 2 ¹ / ₂ | | 2 ³ / ₄ | | 3 ¹ / ₄ | | 3 ⁵ / ₈ | | 1 ³ / ₄ | | 2 ¹ / ₂ | 2 ¹ / ₈ | 2 ⁷ / ₈ | 3 ¹ / ₈ |
| E Hub Length | 9/ ₁₆ | | 9/ ₁₆ | | 9/ ₁₆ | | 3/ ₄ | | 1/ ₄ | | 9/ ₁₆ | 3/ ₁₆ | 5/ ₈ | 9/ ₃₂ |
| Keyway | 1/ ₄ x3/ ₃₂ | | 3/ ₈ x1/ ₈ | | 3/ ₈ x1/ ₈ | | 3/ ₈ x1/ ₈ | | 3/ ₁₆ x1/ ₁₆ | | 3/ ₈ x1/ ₈ | 1/ ₄ x3/ ₃₂ | 3/ ₈ x1/ ₈ | 3/ ₈ x1/ ₈ |
| *Max. Bore | 1 ¹¹ / ₁₆ | | 1 ⁷ / ₈ | | 2 ¹ / ₂ | | 2 ³ / ₄ | | 1 | | 1 ¹ / ₂ | 1 ³ / ₁₆ | 2 | 1 ⁵ / ₈ |
| Wt. each, lbs. | 1.88 | | 2.69 | | 5.25 | | 8.25 | | .62 | | 2.87 | 1.00 | 5.00 | 2.00 |
| Torque (lb. in.) | Gear | | 1807 | | 2809 | | 4929 | | 7496 | | 2300 | | 3922 | |
| | Pinion | | 1807 | | 2809 | | 4929 | | 7496 | | 1150 | | 1961 | |

Note: All dimensions are in inches.

*Keyway Unchanged.

TANGENTIAL LOAD COEFFICIENTS FOR BEARING LOADS

The normal load on spiral bevel gear tooth surfaces may be resolved into three (3) components: (Wt) tangential; (Wx) axial and (Wr) radial.

The tangential and radial components act in a plane perpendicular to the gear axis and produce radial bearing loads. The axial component acts in a direction parallel to the axis producing thrust plus additional radial bearing loads.

The value of the axial and radial loads can be determined by multiplying the tangential load at mid face (Wtm) by the applicable coefficient (Kx) or (Kr) for the concave or convex load face of either the pinion (p) or the gear (g).

Fig. 24 is a table of coefficients (Kx) and (Kr) vs. gear ratios for 35° spiral bevel gears with 90° shaft angles and 20° pressure angle. Note the (+) values indicate forces tending to separate the two gears and the (-) values indicate forces drawing the gears into tighter mesh.

Fig. 24 - Tangential Load Coefficients for Bearing Loads

Coefficients for Spiral Bevel Gears:
Σ=90° Shaft Angle/φ=20° Pressure Angle/ψ=35° Spiral Angle

| Load Face | Concave Pinion | Convex Gear | Convex Pinion | Concave Gear |
|-------------|----------------|-------------|---------------|--------------|
| Ratio Ng/np | Kxp=(Krg) | Kxg=(Krp) | Kxp=(Krg) | Kxg=(Krp) |
| 1.0 | .809 | -.181 | -.181 | .809 |
| 1.1 | .817 | -.142 | -.219 | .800 |
| 1.2 | .822 | -.107 | -.253 | .790 |
| 1.3 | .826 | -.075 | -.284 | .779 |
| 1.4 | .828 | -.045 | -.312 | .769 |
| 1.5 | .829 | -.019 | -.336 | .758 |
| 1.6 | .829 | .006 | -.358 | .748 |
| 1.7 | .829 | .028 | -.378 | .738 |
| 1.8 | .828 | .048 | -.396 | .728 |
| 1.9 | .827 | .067 | -.413 | .719 |
| 2.0 | .825 | .084 | -.428 | .711 |
| 2.5 | .815 | .152 | -.485 | .673 |
| 3.0 | .805 | .200 | -.524 | .643 |
| 3.5 | .795 | .235 | -.551 | .620 |
| 4.0 | .787 | .261 | -.572 | .601 |
| 4.5 | .780 | .282 | -.587 | .586 |
| 5.0 | .774 | .298 | -.599 | .573 |
| 5.5 | .768 | .312 | -.609 | .562 |
| 6.0 | .764 | .323 | -.618 | .553 |
| 6.5 | .760 | .333 | -.625 | .546 |
| 7.0 | .756 | .341 | -.630 | .539 |
| 7.5 | .753 | .348 | -.635 | .533 |
| 8.0 | .750 | .354 | -.640 | .528 |
| 8.5 | .747 | .359 | -.643 | .523 |
| 9.0 | .745 | .364 | -.647 | .519 |
| 9.5 | .743 | .369 | -.650 | .515 |
| 10.0 | .741 | .372 | -.653 | .512 |

$$W_t = \text{Tangential Load} = \frac{126050 \text{ HP}}{d \text{ RPM}_p}$$

$$W_{tm} = \text{Tangential Load at Mid-Face} = \frac{W_t}{\left[1 - \frac{F}{d \sqrt{1+mg^2}}\right]}$$

$$W_x = \text{Axial Load Component} = K_x W_{tm}$$

$$W_r = \text{Radial Load Component} = K_r W_{tm}$$

$$r_{mp} = \frac{d - F}{2 \sqrt{2(1+mg^2)}}$$

HP = Horsepower
d = Pinion Pitch Diameter
F = Face Width
mg = Ratio NG/NP
K_x = Axial Coefficient
K_r = Radial Coefficient
RPM_p = Pinion RPM
r_{mp} = pinion mean pitch radius
r_{mg} = gear mean pitch radius
r_{mg} = r_{mp} × mg

Fig. 25 - Normal Tooth Load Components

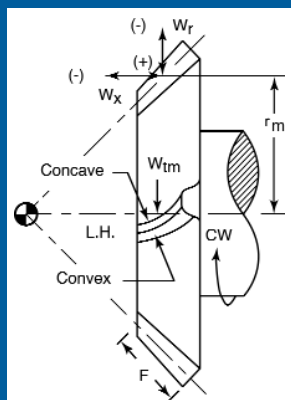


Fig. 26 - Normal Backlash at Tightest Point of Mesh

| Diametral Pitch | Backlash |
|-----------------|----------------|
| 1 | .020" to .030" |
| 2 | .012" to .016" |
| 3 | .008" to .011" |
| 4 | .006" to .008" |
| 6 | .004" to .006" |
| 10 | .002" to .004" |
| 20 and Finer | .001" to .003" |

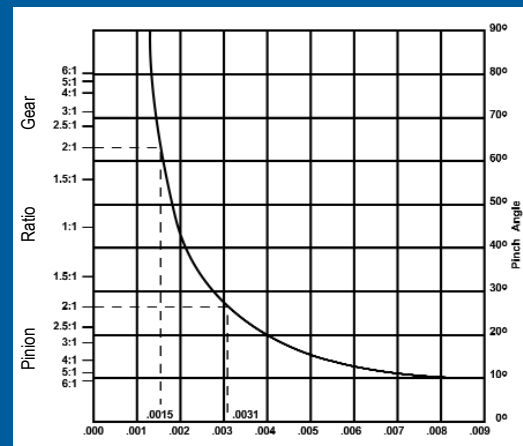


Fig. 27 - Axial Movement Per .001" Change in Backlash (Inches)

INSTALLATION

Mounting Distance

The correct setting or adjustment of the pinion at assembly is most important. Provision should be made for adjusting both the gear and pinion axially. It is advisable to first adjust the pinion to its correct mounting distance (See figure 28), determined by measurement or by a gage centered on the gear shaft or a "dummy" shaft made for this purpose. The gage may be arranged to measure from the center of the gear shaft to a flat on the extreme small end of the pinion teeth or to the back face of the pinion hub. After the pinion has been correctly positioned, the gear should then be adjusted to mesh with the pinion to obtain the desired amount of backlash.

The shims used in adjusting the gear and pinion location, and the bearing preload, should not be less than 0.015" thick and should preferably be on the stationary member of the bearing.

A means of inspecting the gears in mesh is desirable both from an assembly standpoint and for periodic check. An inspection hole and cover should be arranged so that the contact pattern can be observed on the teeth of both members of the gear set.

In storage or during shipment lapped gears should always be fastened together in pairs or sets, and they should not be separated until ready to assemble.

Backlash

Bevel gears should be manufactured and assembled to have a definite amount of backlash, which varies according to pitch and operating conditions. Backlash is necessary for safe operation. If gears are set too tight they will be noisy, wear excessively, and possibly scuff the tooth surfaces, or even break. Figure 27 shows the ratio at which the axial movement of either member affects the backlash.

Figure 26 suggests the recommended normal backlash at tightest point of mesh for gears assembled, ready to run. The backlash values etched on ARROW gears are derived from this table and apply to the tightest point of mesh. (See also Figure 29). In many instances, these limits will require modifications to suit the special conditions of operation.

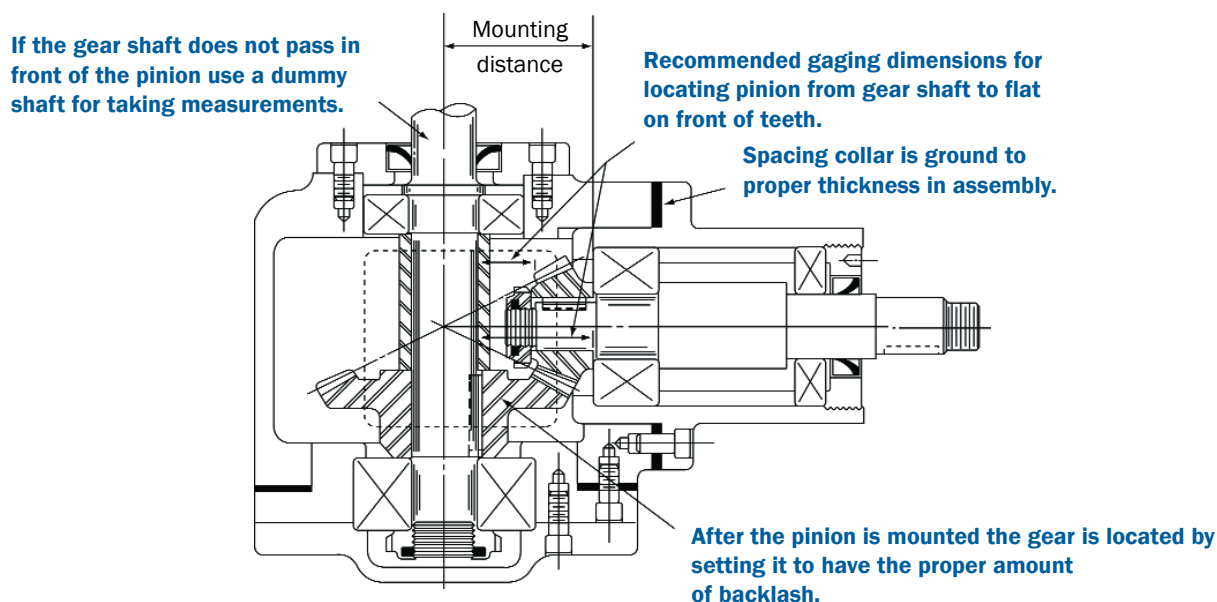


Fig. 28 - Measuring or gaging as shown is the recommended method for locating the pinion. Pinion should be set to mounting distance marked on pinion, and gear should be adjusted to give correct backlash.

Courtesy: The Gleason Works

MOUNTINGS

Rigid mountings should be provided to hold the displacements of the gears under operating loads within recommended limits. Care should be taken to see that keys are hardened, properly fitted and that couplings are not out of true or out of square.

For a number of years the Gleason Works has been making deflection tests on gears and their mountings and observing these same units in service. From these tests the recommended allowable deflections under maximum service load have been determined for gears from 6" to 15" diameter:

1. The pinion should not lift or depress more than 0.003".
2. The pinion should not yield axially more than 0.003" in either direction.
3. The gear should not lift or depress more than .003".
4. The gear should not yield axially more than 0.003" in either direction on miters or near miters or more than 0.010" away from the pinion on higher ratios.

Spiral bevel gears should in general be mounted on anti-friction bearings in an oil-tight case. While designs may be made for a given set of conditions using plain bearings for radial and thrust loads, the problem of maintaining the gears in satisfactory alignment is usually more easily accomplished with ball or roller bearings.

There are two general types of pinion mountings, namely the straddle and the overhung mounting. Either ball or roller bearings may be used in both types of mountings.

Ball bearings with extremely small axial yield should be used behind each pinion to take care of combined thrust and radial loads.

Matched angular contact or double row deep groove angular contact bearings are preferred. At the other end of the shaft a single row radial bearing may be used as shown in Figures 30 and 33.

When mounted on taper roller bearings, the indirect mounting should be used. That is, the large ends of the tapered rollers of each bearing should point outward as shown in Figures 31 and 32. The thrust load of the pinion is thus absorbed by the bearing adjacent to the pinion and the reverse thrust load will be taken by the opposite bearing.

In either type of mounting both the gears and thrust bearings should be locked against thrust in either direction. This applies to straight bevel and Zerol® bevel gears as well as to spiral bevel and hypoid gears. It is accepted practice to preload the bearings to remove initial freedom in the mounting. The amount of preload depends upon the mounting load and operating speed, and should be established by the bearing manufacturer.



Fig. 29 - All Arrow Stock Gears are marked with the above assembly information.

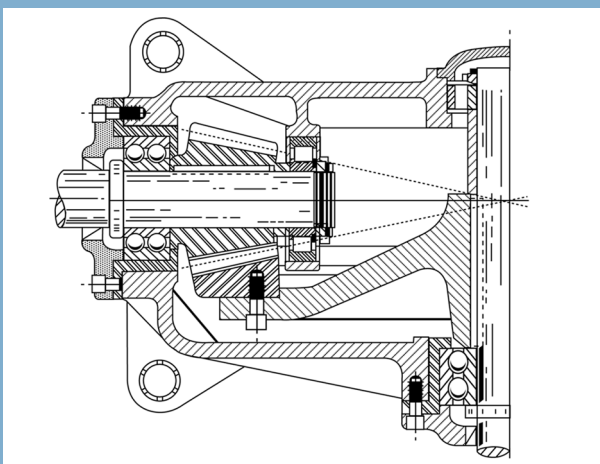


Fig. 30 - Typical straddle mounting for both members of a spiral bevel pair

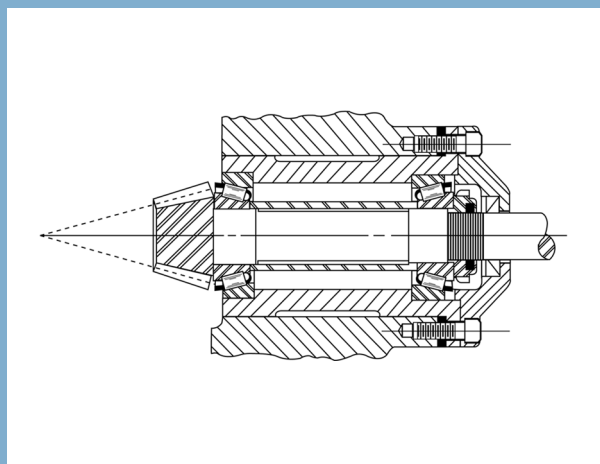


Fig. 31 - This mounting is another form of bearing arrangement for overhung pinions.

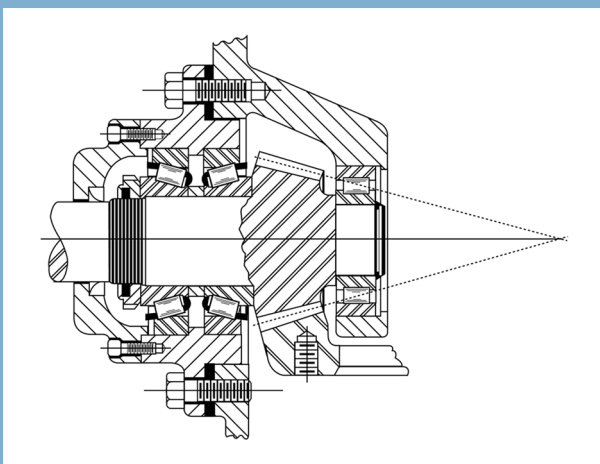


Fig. 32 - Straddle pinion mounting for short shafts showing use of combined thrust and radial bearings. Gear mounted in oil-tight case.

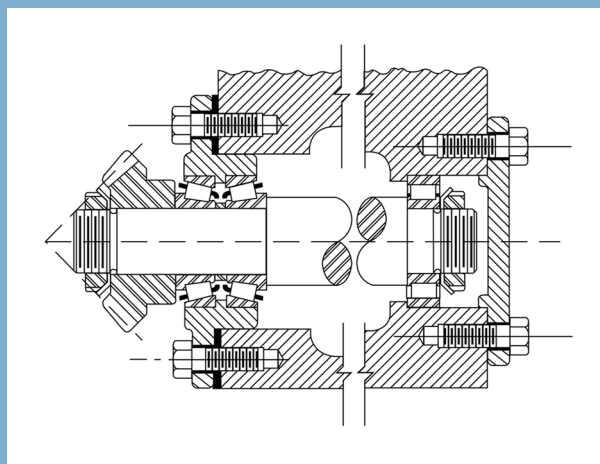



Fig. 33 - Arrangement recommended for long shafts to prevent temperature changes affecting position of gear mounted in oil-tight case.

Acknowledgment is gratefully extended to Gleason Works, Rochester, New York and to the American Gear Manufacturers Association for portions of the text and illustrative material used in this section.


BEARING PATTERN

Using a suitable marking compound, check the bearing pattern. If the markings on the gear set have been followed, the pattern will conform to accepted standards.

Gears are cut with a contact pattern about half the length of the tooth, the location slightly




Desirable Bearing Pattern



favoring the toe end of the tooth. Under load the pattern will shift somewhat toward the heel of the tooth, and will thus become more central. Under no circumstances must the pattern be concentrated on the ends of the teeth.


PROFILE ERROR

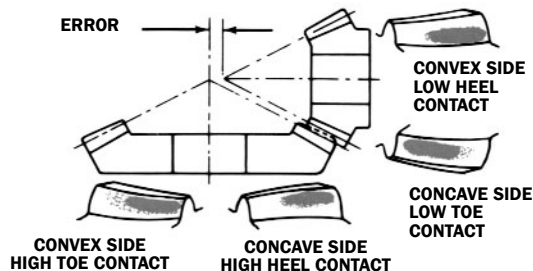To correct: decrease mounting distance




PROFILE ERROR

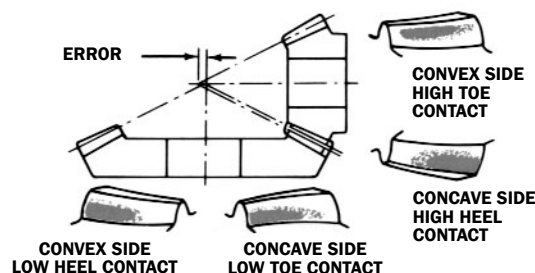To correct: increase mounting distance




CROSS CONTACT

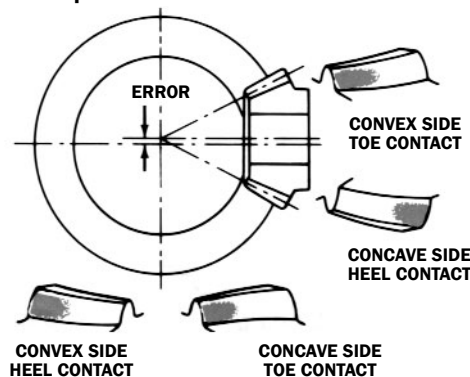To correct: move pinion down




CROSS CONTACT

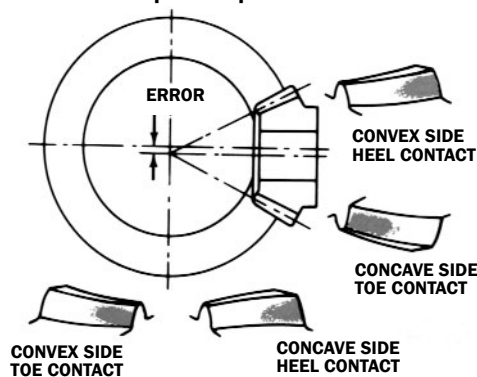To correct: move pinion up




SHAFT ANGLE ERROR

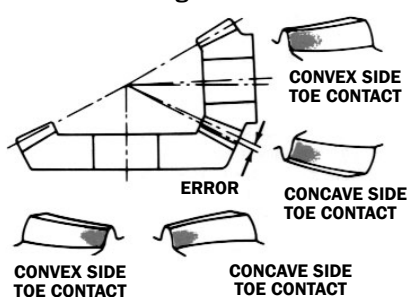To correct: decrease shaft angle



SHAFT ANGLE ERROR

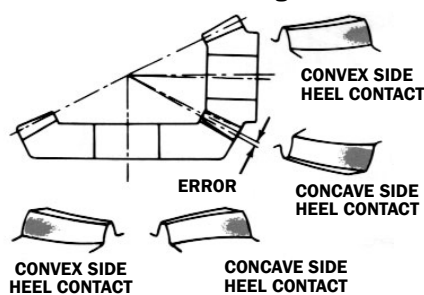To correct: increase shaft angle



(Note: Pinion member is left hand in all illustrations.)

All Illustrations: Courtesy of The Gleason Works.

APPLICATION ENGINEERING INFORMATION

GEARS AND GEARDRIVES



Provide the following data in line with your specific requirements.

Please complete the form, reproduce it, and send it along with a sketch of the application.

Company _____
 Name _____ Title _____
 Street _____
 City _____ State _____ Zip _____ Country _____
 Telephone _____ Fax _____
 Email _____

1. QUANTITY: Prototype _____ Production _____

2. APPLICATION: _____

3. RATIO: Approx _____ Exact _____ Reducer ☐ Increaser ☐
 Reversing: Yes ☐ No ☐

4. RATING: Normal Input HP _____ @RPM _____ Torque _____
 Maximum Input HP _____ @RPM _____ Torque _____

5. TYPE OF LOAD: Uniform ☐ Med. Shock ☐ Hi Shock ☐

Prime Mover _____

GEAR DATA

Type:

☐ Spiral Bevel Pitch _____
☐ Zerol Bevel No of teeth _____
☐ Straight Bevel Pr Angle _____
☐ Hypoid Spiral Angle _____
☐ Spur Shaft Angle _____
☐ Helical AGMA Class _____
☐ Other Material _____

Part No. _____

ENCLOSED DRIVES

Shaft Requirements:

☐ Parallel ☐ Intersect ☐ Skew
☐ Angle _____
☐ Other _____

Duty Cycle _____
 B10 Life _____ hrs
 Overhung load _____
 Type of Lub. _____

6. Size Limitations _____

7. IT IS ESSENTIAL THAT YOU SEND AN ASSEMBLY PRINT OR SKETCH SHOWING

- driving member and direction of rotation
- means of absorbing axial & radial gear loads
- provisions for adjusting backlash
- method of connecting the gearset to power source
- size & mounting constraints

8. STATE ANY UNUSUAL DESIGN PARAMETERS _____



2301 Curtiss Street
Downers Grove, IL 60515, USA
(630) 969-7640 Fax: (630) 969-0253
www.ArrowGear.com

© 2008, Arrow Gear Company

2008 V1

